


TP672P(H)

Polycrystalline Solar Module
72 Cell Series

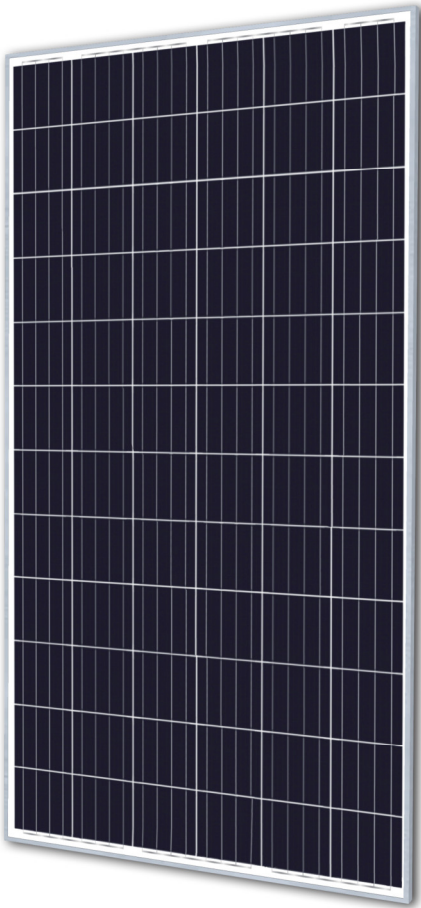

KEY FEATURES

330W

Highest power output

10 years

Material & workmanship warranty

PID Free

Certified by TUV Rheinland

25 years

Linear power output warranty

1500V

System Voltage

- Positive power tolerance: 0-+3%
- Robust design: Certified to withstand up to 2400 Pa wind load and up to 5400 Pa snow load
- Proved high reliability built on dozens of projects
- Four busbar cell: Improve the efficiency of modules

QUALITY WARRANTY

TALESUN guarantees that defects will not appear in materials and workmanship defined by IEC61215, IEC61730 and UL1703 under normal installation, use and maintenance as specified in Talesun's installation manual for 10 years from the warranty starting date.



ABOUT TALESUN

Suzhou Talesun Solar Technologies Co., Ltd. is one of the world's largest integrated PV manufacturers. Its standard and high-efficiency product offerings are among the most powerful and cost-effective in the industry. With over 6 GW of modules installed globally, we are a leading solar energy company built upon proven product reliability and sustainable performance.

PERFORMANCE WARRANTY

Polycrystalline Solar Cell Modules

- During the first year, TALESUN guarantees the nominal power output of the product will be no less than 97.5% of the labeled power output.
- From year 2 to year 24, the nominal power decline will be no more than 0.7% in each year; by the end of year 25, the nominal power output will be no less than 80.7% of the labeled power output.

ELECTRICAL PARAMETERS

Performance at STC (Power Tolerance 0 - +3%)				
Maximum Power (Pmax/W)	315	320	325	330
Operating Voltage (Vmpp/V)	36.8	37.1	37.4	37.7
Operating Current (Impp/A)	8.56	8.63	8.70	8.76
Open-Circuit Voltage (Voc/V)	45.2	45.5	45.7	45.9
Short-Circuit Current (Isc/A)	9.11	9.16	9.22	9.27
Module Efficiency ηm(%)	16.2	16.5	16.7	17.0

Performance at NOCT				
Maximum Power (Pmax/W)	232	236	240	243
Operating Voltage (Vmpp/V)	33.8	34.1	34.4	34.6
Operating Current (Impp/A)	6.88	6.92	6.98	7.04
Open-Circuit Voltage (Voc/V)	41.7	42.0	42.2	42.3
Short-Circuit Current (Isc/A)	7.38	7.42	7.46	7.51

*STC: 1000W/m², 25°C, AM 1.5 *NOCT: 800W/m², 20°C, AM 1.5, Wind Speed: 1m/s

MECHANICAL SPECIFICATION

Cell Type	Poly Crystalline
Cell Dimensions	156.75*156.75mm(6inch)
Cell Arrangement	72(6*12)
Weight	22kg(48.5lbs)
Module Dimensions	1960*992*40mm(77.17*39.06*1.57inch)
Cable Length	1200mm(47.24inch)
Cable Cross Section Size	4mm ² (0.006sq.in)
Front Glass	3.2mm High Transmission, Tempered Glass
No. of Bypass Diodes	3/6
Packing Configuration (1)	27pcs/Pallet, 648pcs/40hq
Packing Configuration (2)	27pcs+4pcs/Pallet, 696pcs/40hq
Frame	Anodized Aluminium Alloy
Junction Box	IP65/IP67

OPERATING CONDITIONS

Maximum System Voltage	1500V/DC(IEC)
Operating Temp.	-40 C. +85 C
Maximum Series Fuse	15A
Static Loading	5400Pa
Conductivity at Ground	≤ 0.1Ω
Safety Class	II
Resistance	≥ 100MΩ
Connector	MC4 Compatible


SUZHOU TALESUN SOLAR TECHNOLOGIES CO.,LTD.

Email: sales@talesun.com Web: www.talesun.com Tel: + 86 400 885 1098


TEMPERATURE COEFFICIENT

Temperature Coefficient Pmax	-0.40%/°C
Temperature Coefficient Voc	-0.31%/°C
Temperature Coefficient Isc	+0.06%/°C
NOCT	45±2 C

I-V CURVE TP672P Pm(W)320

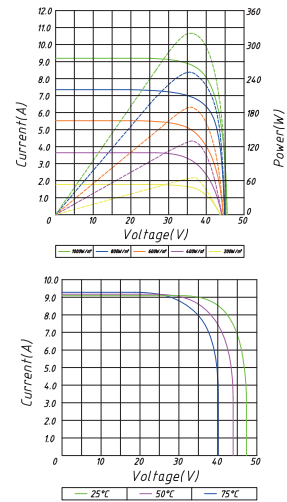

TECHNICAL DRAWINGS

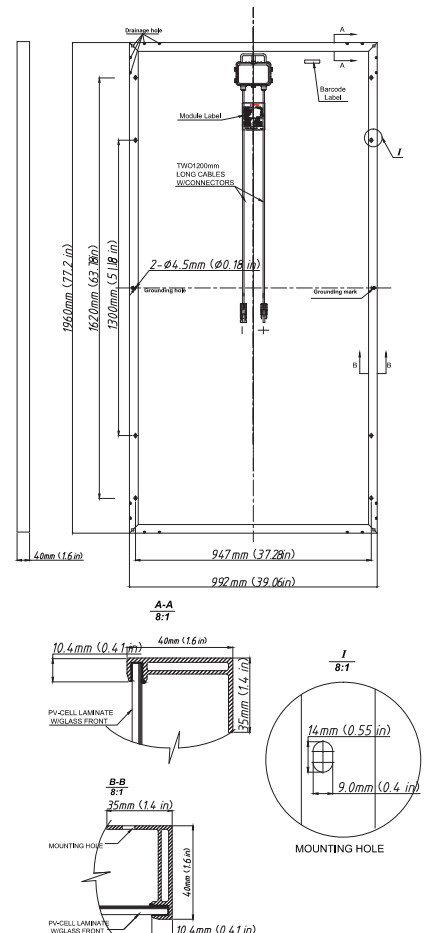

Specifications subject to technical changes without notice. Talesun Solar Rev. 2017.7