


# HIPRO

TP672M **72-cell**

**375 - 390W**  
mono perc

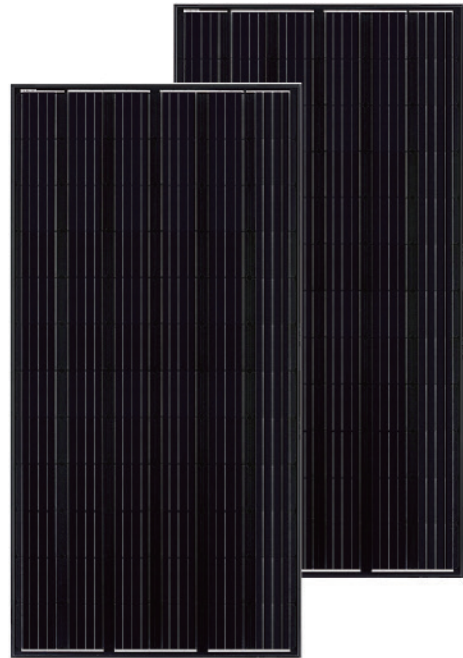

## KEY FEATURES

Anti  
PID

### Excellent Anti-PID performance

2 times of industry standard Anti-PID test by TUV SUD



### IP68 junction box

High waterproof level



### Lower temperature coefficients

Enhance power generation

## SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 1703
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems




## PERFORMANCE WARRANTY

**12** years  
Quality assurance

**25** years  
Power output guarantee

■ Talesun standard  
■ Industry standard

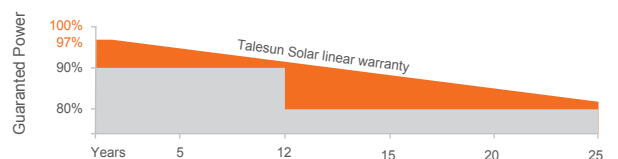

## ELECTRICAL PARAMETERS

### Performance at STC (Power Tolerance 0 ~ +3%)

Maximum Power (Pmax/W)	375	380	385	390
Operating Voltage (Vmpp/W)	39.3	39.6	39.8	40.0
Operating Current (Impp/A)	9.55	9.60	9.68	9.75
Open-Circuit Voltage (Voc/V)	48.0	48.3	48.5	48.7
Short-Circuit Current (Isc/A)	10.15	10.20	10.28	10.35
Module Efficiency $\eta$ m(%)	18.9	19.2	19.4	19.7

### Performance at NMOT

Maximum Power (Pmax/W)	280	283.6	287.4	290.9
Operating Voltage (Vmpp/W)	36.5	36.8	36.9	37.1
Operating Current (Impp/A)	7.67	7.71	7.78	7.83
Open-Circuit Voltage (Voc/V)	44.7	45.0	45.2	45.4
Short-Circuit Current (Isc/A)	8.19	8.23	8.3	8.35

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5 NMOT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s

## MECHANICAL SPECIFICATION

Cell Type	Mono-Crystalline Silicon (5Busbar/ 12Busbar)
Cell Dimensions	158.75*158.75mm (6inches)
Cell Arrangement	72 (6*12)
Weight	22.5kg (49.6lbs)
Module Dimensions	1979*1002*35mm (77.91*39.45*1.38inches)
Cable Length	1200mm (42.24inches)
Cable Cross Section Size	4mm <sup>2</sup> (0.006inches <sup>2</sup> )
Front Glass	3.2mm High Transmission, Tempered Glass
No. of Bypass Diodes	3/6
Packing Configuration (1)	31pcs/carton, 682pcs/40hq
Packing Configuration (2)	31+4pcs/carton, 726pcs/40hq
Frame	Anodized Aluminium Alloy
Junction Box	IP68



## OPERATING CONDITIONS

Maximum System Voltage	1500V/DC
Operating Temperature	-40°C ~ +85°C
Maximum Series Fuse	20A
Static Loading	5400pa
Conductivity at Ground	≤0.1Ω
Safety Class	II
Resistance	≥100MΩ
Connector	MC4 Compatible

## TEMPERATURE COEFFICIENT

Temperature Coefficient Pmax	-0.36%/°C
Temperature Coefficient Voc	-0.26%/°C
Temperature Coefficient Isc	+0.043%/°C
NMOT	43±2°C

## I-V CURVE

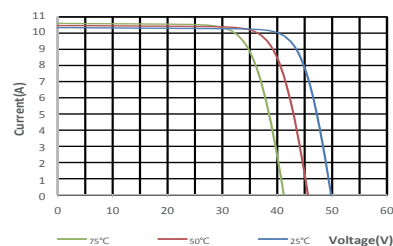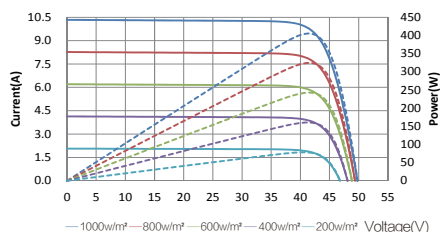

## TECHNICAL DRAWINGS

